



Technical Characteristics

- Patented high speed motor (VFD integrated)
- Compact & light weight
- MODBUS compatible
- 18,000 hours maintenance free

Electric Motor


- Insulation Class H
- VFD/VSD integrated
- Adjust speed instantly via HMI or MODBUS
- 3rd party PLC
- IP65

Options

- Single or 3Ph power
- 50 or 60Hz

Rpm	Pressure																	
	10kPa		15kPa		20kPa		25kPa		30kPa		35kPa		40kPa		45kPa		50kPa	
	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)
60k			4.60	1.56	2.80	1.28												
65k			5.50	1.94	4.70	1.64												
70k					5.50	2.50	4.60	2.33										
75k							5.90	3.06	4.80	2.89								
80k							6.67	3.78	5.80	3.67	4.90	3.39						

Performance Range

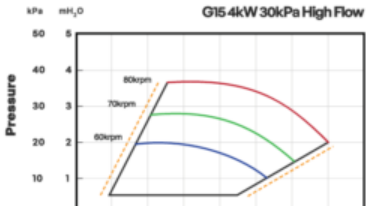

Get Smart About Energy -
Scan for Your Savings.

For more information visit
www.gpiflow.com.au
www.smartscan.stb.com.au

