



Technical Characteristics

- Patented high speed motor (VFD integrated)
- Compact & light weight
- MODBUS compatible
- 18,000 hours maintenance free

Electric Motor


- Insulation Class H
- VFD/VSD Integrated
- Adjust speed instantly via HMI or MODBUS
3rd party PLC
- IP65

Options

- 3Ph 380V
- 50 or 60Hz

Rpm	Pressure																		
	10kPa		15kPa		20kPa		25kPa		30kPa		35kPa		40kPa		45kPa		50kPa		
	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	Flow Rate (m ³ /min)	Power (kW)	
60k	9.8	2.5	9.0	2.8	7.0	2.9													
65k			10.50	3.5	9.0	3.7	7.0	3.8											
70k			11.50	4.1	10.5	4.4	9.3	4.6											
75k			12.3	5.0	12.00	5.0	11.00	5.5	9.5	5.7									
80k			13.5	6.0	13.2	6.2	12.5	6.5	11.5	6.9	10.0	7.0	8.0	6.7					

Performance Range

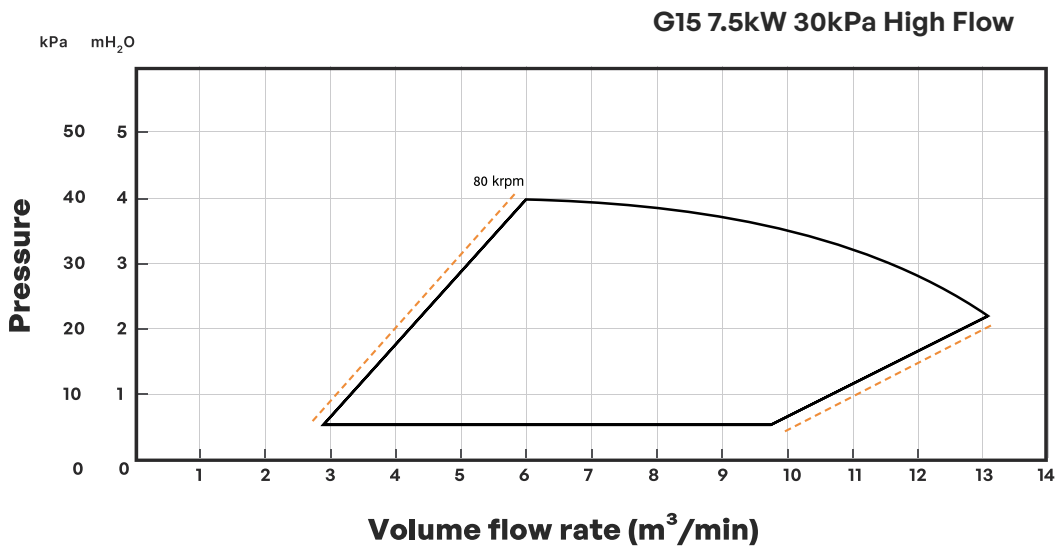

Get Smart About Energy –
Scan for Your Savings.


for more information visit
www.sprintex.com.au
www.smartaeration.au




Model	Max. Pressure kPa gauge	Max. Flow Rate m ³ /min	Max. Flow Rate m ³ /h	Max. Speed rpm	Rated Power kW	Dimensions W x D x H mm	Compressed Air Connection Φ mm Hose Clamp	Max. Sound Pressure Level dB(A)	Mass kg
G15 7.5kW 30kPa High Flow	40	13	780	80,000	7.5	601 × 265 × 374	75	74	14.8

Dimensions

Front View

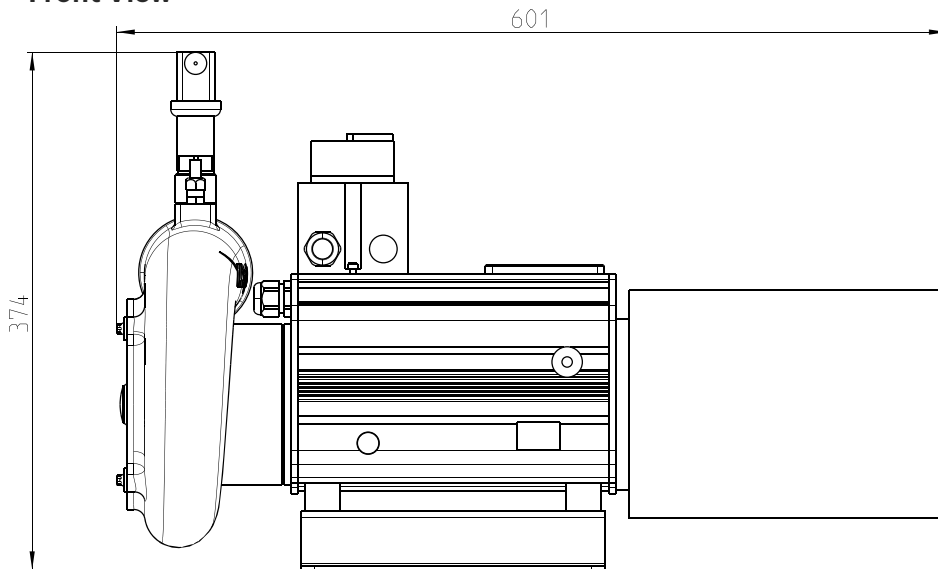

Side View

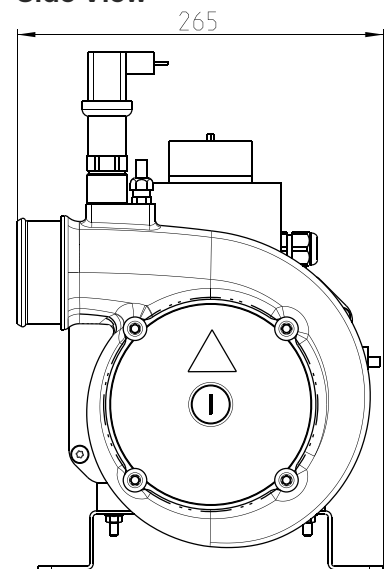

Top View

