



Technical Characteristics

- Patented high speed motor (VFD integrated)
- Compact & light weight
- MODBUS compatible
- 18,000 hours maintenance free

Electric Motor


- Insulation Class H
- VFD/VSD integrated
- Adjust speed instantly via HMI or MODBUS
- 3rd party PLC
- IP65

Options

- 3Ph 380V
- 50 or 60Hz

Rpm	Pressure																			
	10kPa		15kPa		20kPa		25kPa		30kPa		35kPa		40kPa		45kPa		50kPa			
	Flow Rate (m³/min)	Power (kW)	Flow Rate (m³/min)	Power (kW)	Flow Rate (m³/min)	Power (kW)	Flow Rate (m³/min)	Power (kW)	Flow Rate (m³/min)	Power (kW)	Flow Rate (m³/min)	Power (kW)	Flow Rate (m³/min)	Power (kW)	Flow Rate (m³/min)	Power (kW)	Flow Rate (m³/min)	Power (kW)		
60k			9.00	3.1	8.00	3.2	6.2	3.0												
65k			10.0	4.0	9.1	4.2	8.4	4.2	7.2	4.0	5.6	3.6								
70k			11.0	4.8	10.8	5.0	10.0	5.1	9.0	5.2	8.0	5.0	5.8	4.5						
75k					11.5	6.5	11.4	6.5	11.2	6.7	9.8	6.8	8.7	6.6	6.4	6.4	6.2	6.2		

Performance Range

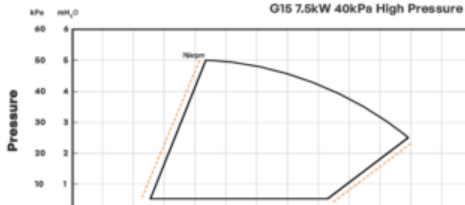

Get Smart About Energy -
Scan for Your Savings.

For more information visit
www.spiritech.com.au
www.spiral-technology.com

